



CMCP630VP Portable Vibration Pen



Features

- Quick and Easy to Setup and Use
- Backlit LCD Display for Low Light Conditions
- Lightweight, Compact and Ergonomically Designed Case
- Velocity, Acceleration and Displacement Measurements
- Peak Hold Function
- Anti-Interference Technology to Eliminate Hand Jitter
- 30 Hour Battery Life (Continuous Use)
- Rechargeable Battery
- Conforms to ISO10816
- Charger, Travel Case, Storage Bag, Lanyard and ISO 10816-3 Severity Chart Included

Typical Applications

Electrical motors of any type, blowers or fans, generators, industrial gas turbines with power up to 3 MW, rotary compressors, certain steam turbines, and many more.

Product Overview

The CMCP630VP is a portable, handheld vibration meter designed for operators, maintenance personnel and Inspectors. The Vibration Pen complies the ISO 10816 Standard for Mechanical Vibration of industrial machines with nominal power above 15 kW and nominal speeds between 120 r/min and 15 000 r/min with the Sensor (Instrument) located directly on and in contact with the measurement point.


The CMCP630VP features a shockproof high strength aluminum case, backlit LCD display for low light and direct sunlight conditions and a simple two button operation. The Vibration Pen is capable of measuring Acceleration, Velocity and Displacement and can display the highest measurement using the Peak Hold function. The rechargeable lithium-ion battery allows for up to 30 hours of continuous measurements and recharges using a standard 5VDC USB charger which is provided with the kit. An ISO 10816-3 Vibration Severity Chart is included with the kit for easily referencing the measurement with industry standards.

Specifications

Case Material:	5052 Aluminum – Anodized
Tip Material:	316 Stainless Steel
Battery Life:	30 Hours on Full Charge
Charger:	5V USB Wall Charger (Included)
Velocity Range:	0-8.0 In/s (0-203 mm/s) RMS
Frequency Range:	10 Hz to 1.0 kHz (ISO Standard)
Acceleration Range:	0-20 g Peak
Frequency Range 1:	10 Hz to 1.0 kHz
Frequency Range 2:	10 Hz to 15 kHz
Displacement Range:	0-80 mils (2,032 µm)
Frequency Range:	10 to 500 Hz
Dimensions:	6.11"x0.90"x0.47" (156 x 23 x 12 mm)



Dimensions

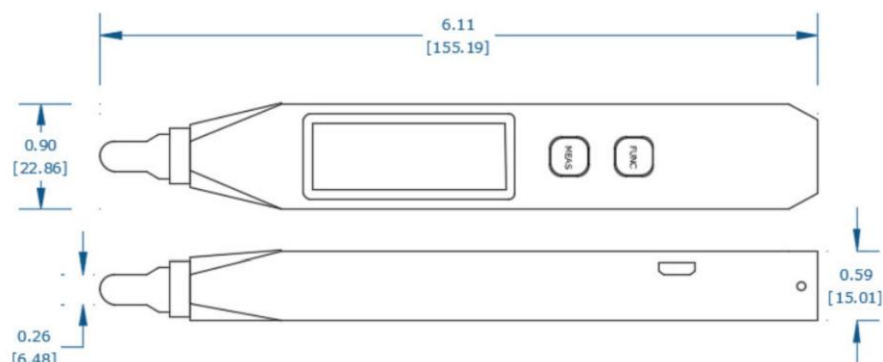

Items Included

Vibration Pen
 Hard Travel Case
 USB Wall Charger
 USB Charging Cable
 Storage Bag
 Lanyard
 Manual
 ISO 10816-3 Severity Chart:

ISO 10816-3		Group 1	Group 2
		Large machines 300 kW < power < 50 MW	Medium machines 15 kW < power < 300 kW
in/sec peak	mm/s rms	Motor height >315 mm	Motor 160 mm < height < 315 mm
0.61	11.0	Damage occurs	
0.39	7.1	Restricted operation	
0.25	4.5		
0.19	3.5		
0.16	2.8	Unrestricted operation	
0.13	2.3		
0.08	1.4	Newly commissioned machinery	
0.04	0.7		
0.00	0.0		
Foundation		Flexible	Rigid

Ordering Information

CMCP630VP-E Portable Vibration Pen Kit, English Units
 CMCP630VP-M Portable Vibration Pen Kit, Metric Units

Images

